

# GENERAL ELECTRIC GARDEN TOOLS

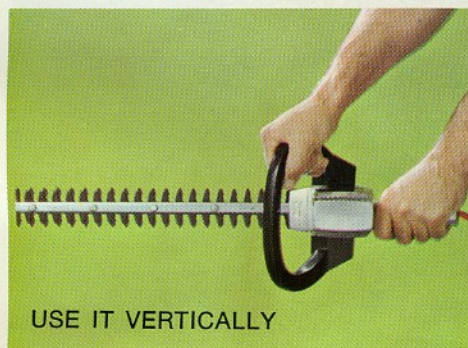
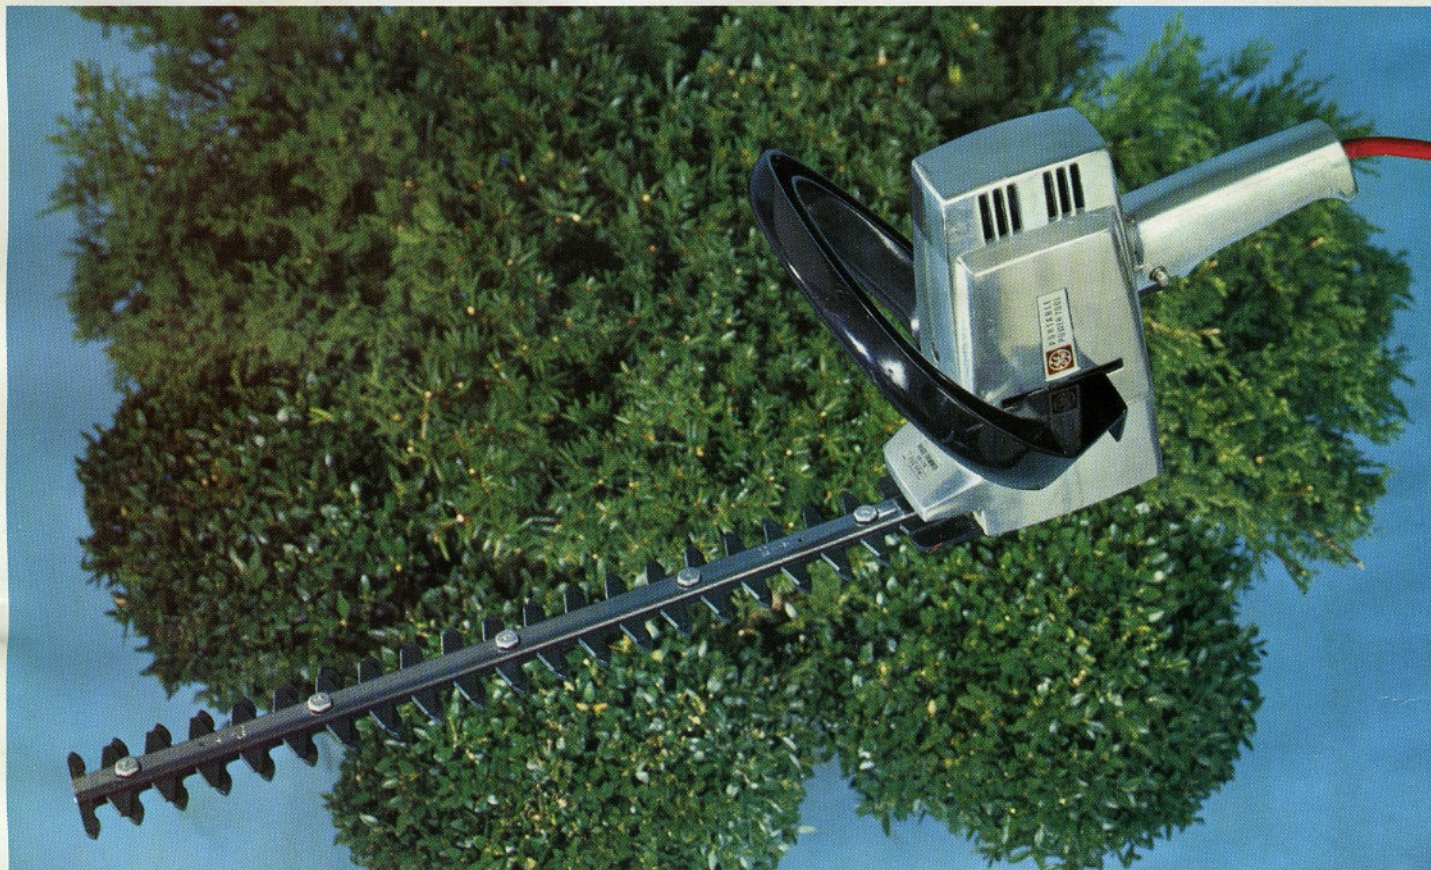


GENERAL  
ELECTRIC

## HEDGE and SHRUB TRIMMER MODEL TA-70

LANDSCAPE LIKE A PROFESSIONAL. SHEARS UP TO 3/8" BRANCHES WITH EASE!

- Features 15" double edge steel blades with reciprocating motion.
- Helper handle makes it easy to use in horizontal or vertical positions.
- Hedge and shrub trimmer head TH-70 fits standard or variable speed 1/3 hp GE power unit.

USE IT VERTICALLY



USE IT HORIZONTALLY



This TH-70 trimmer head is designed for use on either the GE TM-1 single speed or TM-2 speed control power unit. The 15" double-edged, hardened steel cutting blades mean fast, effective trimming of shrubs and hedges in either direction. The head contains a two-stage reduction gearing system designed to operate the cutting blades at 750 strokes per minute. The bale-type handle packed with each head provides professional balance and handling ease. The die-cast, aluminum housing contains permanently lubricated bearings and weighs only 2½ lbs.

### SPECIFICATIONS:

Motor rated 3.0 amps, 120 volts, 1/3 hp  
AC only, length of cut 15", weight  
5½ lbs. Listed industrially by  
Underwriters' Laboratories, Inc.

# GRASS TRIMMER

MODEL TA-80

**TRIMS HARD TO REACH PLACES.  
LANDSCAPE LIKE A PROFESSIONAL!**

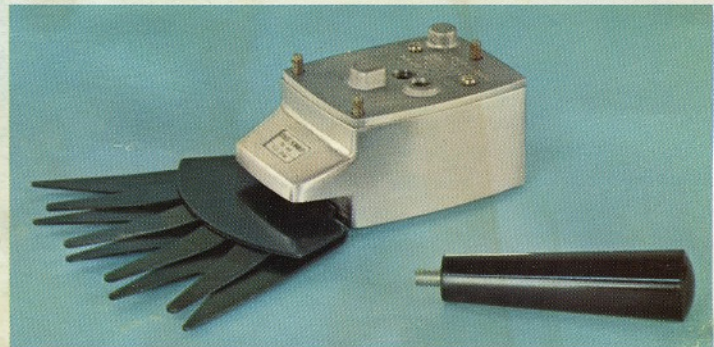
- Ideal for cutting around trees, rocks, along stone walls, under fences.
- Has built-in clutch which will slip to prevent damage to the mechanism should hard objects get into blades.
- Grass trimmer head TH-80 fits standard or variable speed  $\frac{1}{3}$  hp GE power unit.



Stand and wheels for stand up operation of the Grass Trimmer. Available as an optional extra.



The Model TH-80 grass trimmer head is designed for use on either the GE TM-1 single speed or TM-2 speed control power unit. The hardened steel blades have a 5" cutting width, at 750 strokes per minute. A built-in slip-clutch prevents mechanism damage should a hard object get between teeth. The die-cast aluminum housing contains permanently lubricated bearings and weighs only 1 lb. 12 oz.



### SPECIFICATIONS:

width of cut 5", weight 4 lbs. 12 oz. Listed industrially by Underwriters' Laboratories, Inc.

**GENERAL**  **ELECTRIC**